

Lift-Master™

The Professional Line

NOTICE TO U. S. CONSUMERS:

Some states prohibit the service or repair of garage door openers which cannot be made to comply with the safety standards contained in UL 325 (1988 revision). In order to comply with both the letter and the spirit of these laws, this universal radio control should not be used with any Lift-Master®, Chamberlain®, or Sears Craftsman® garage door opener manufactured prior to April 1, 1982. To find out if your Chamberlain-made garage door opener was manufactured prior to or after April 1, 1982, please call 1-800-528-9131 before installing this universal radio control.

Transformer Model 85 may be required if your garage door opener is a brand other than Lift-Master, Chamberlain or Sears.

NOTE: Model 530-1LM is factory pre-set with matching receiver and remote control codes. For maximum security, erase and reprogram the receiver after installation (see page 2). If you purchase additional remote controls, the receiver must be programmed to match the new remote control code (up to seven Code-Guard™ remotes).

For maximum security and range, you must disable the existing radio on your opener, otherwise it could still activate your opener:

- If there is an external receiver, disconnect power to it.
- If it is an integrated receiver, either clip off the component that feeds power to the receiver (for Lift-Master, Sears and Chamberlain openers, see Figure 1) or remove the tuning slug and antenna from the receiver section.
- If you have a Lift-Master, Sears or Chamberlain opener with a "SMART" receiver, erase the old codes by holding down the Smart button for 6 seconds until the indicator light turns off.
- If you have code switches, reset them to a random code and deactivate the receiver by removing the tuning slug and antenna.

The receiver may be installed in one of two ways:

1. Mounted directly on the door opener with clips provided as shown on page one.
2. Attached to an inside wall of the garage with connecting bell wire (not supplied) as shown on page two.

When installing two or more receivers in a garage, position them at least 10 feet apart to prevent electronic interference.

MOUNTING ON RESIDENTIAL OPENERS

Fully extend antenna wire below bottom of case as shown in Figure 2.

Use a 2 wire connection only. Attach mounting clips to receiver terminals 1 and 2, and to the opener terminals used for push button controls. Plug the transformer into the receiver as shown, and into a 120 Volt outlet.

Page two contains wall mounting instructions and service information as well as code setting instructions.

Model 530-1LM Code-Guard™

Universal Radio Control

OWNERS MANUAL

To comply with FCC/IC rules, adjustment or modification of receiver and/or transmitter is prohibited, except for changing the code setting and replacing the transmitter battery. THERE ARE NO USER SERVICEABLE PARTS.



WARNING

Disconnect power to the garage door opener before installing the receiver.

Children operating or playing with a garage door opener can injure themselves and others. *The garage door could close and cause serious injury or death.* Do not allow children to operate the push buttons or the remote control transmitters.

Install the receiver (and any additional push buttons) out of the reach of children and away from all moving parts of the door and door hardware, but *where the garage door is visible.*

A moving garage door could injure someone under it. Activate the opener only when the door is properly adjusted, you can see it clearly, and there are no obstructions to door travel.

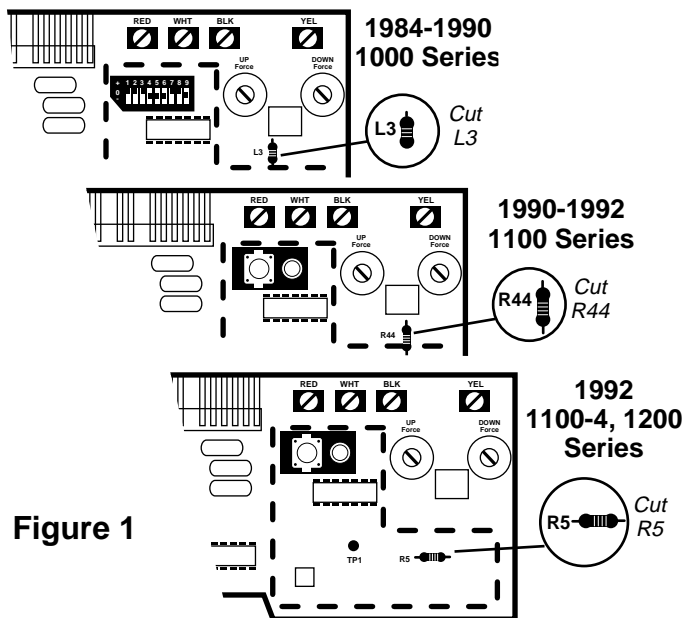


Figure 1

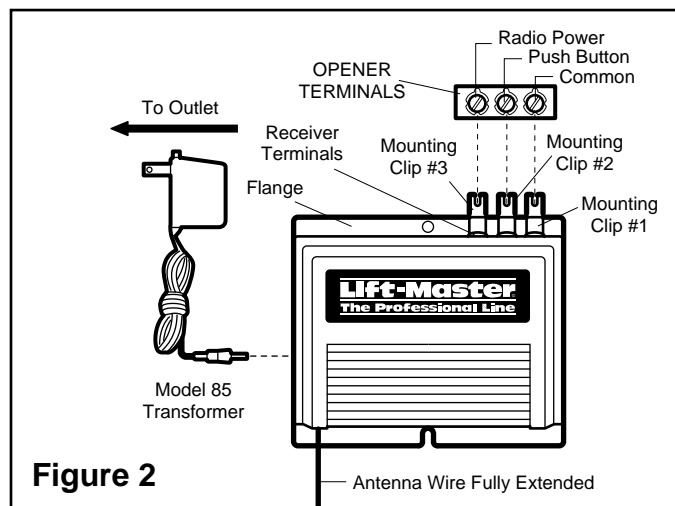


Figure 2

MOUNTING RECEIVER ON GARAGE WALL


Fully extend the antenna wire below bottom of case.

Fasten the receiver to an inside garage wall with dry wall screws provided. A convenient place is alongside the service door and **OUT OF THE REACH OF CHILDREN**.

Attach one end of 3-strand bell wire (not supplied) to receiver terminals 1, 2 and 3. Connect the other end to the three opener terminals used for push button controls and radio power. Use insulated staples to secure bell wire between receiver and opener.

Reconnect power to the opener. The receiver push bar should light. If it does not, use Transformer Model 85.

NOTE: With the transformer, use a 2-wire connection only. Attach wire to receiver terminals 1 and 2 and to the opener terminals used for push button control. Plug the transformer into receiver and 120 Volt outlet as shown.

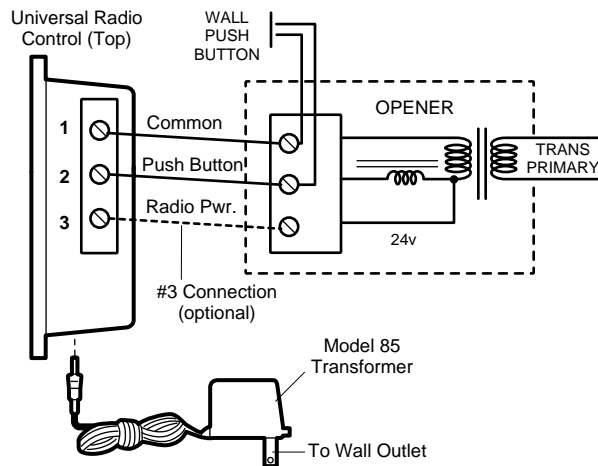

SET RECEIVER TO MATCH REMOTE CONTROL(S) CODE

Pry open the front panel of receiver case with a coin or a screwdriver.

1. Press and *hold* the remote control push button.
2. Then press and release the "Smart" button on the receiver. The adjacent indicator light will *flash* once. Release the remote control push button.


The opener will now operate when the push button on either the receiver or the remote control transmitter is pressed.

Repeat Steps 1 and 2 for each remote control that will be used to operate the garage door opener.

NOTE: If the remote control push button is not held down until the receiver indicator light flashes, the receiver will not learn the code.

TO ERASE ALL REMOTE CONTROL CODES

- Press and hold the "Smart" code button on the receiver panel until the indicator light turns off (about 6 seconds). **All the codes the receiver has learned will be erased.**
- Repeat Steps 1 and 2 to reprogram the receiver for each remote control transmitter in use.

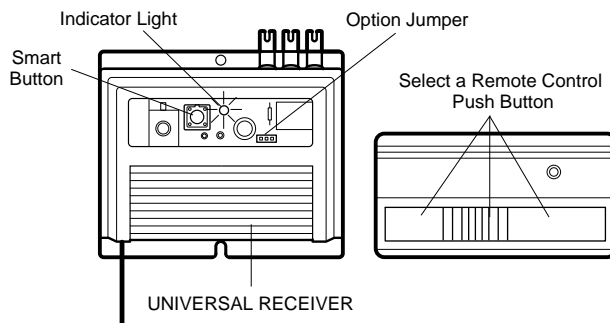

TO SET OUTPUT DURATION



WARNING

The use of radios incorporating constant closure contacts on residential operators with fail-safe infrared protectors is prohibited.

The receiver can be set for either constant or momentary closure on the output contacts. With the jumper in the "MOM" (Momentary) position, the contacts will close for 1/4 second regardless of the length of radio transmission. With the jumper in "CONST" (Constant) position, the contacts will stay closed as long as the radio continues transmitting.

The receiver is factory set at M.

