


OUTSIDE KEYLOCK -- MODEL 760CB


FOR SECTIONAL DOORS:

(For one-piece doors, refer to Page 2.)

STEP: (Illustration 1). Position Keylock in the upper half of garage door jamb. Mark the location on the horizontal center of jamb. Drill a one-inch diameter hole through the jamb or to a depth of two inches (see Step 2).

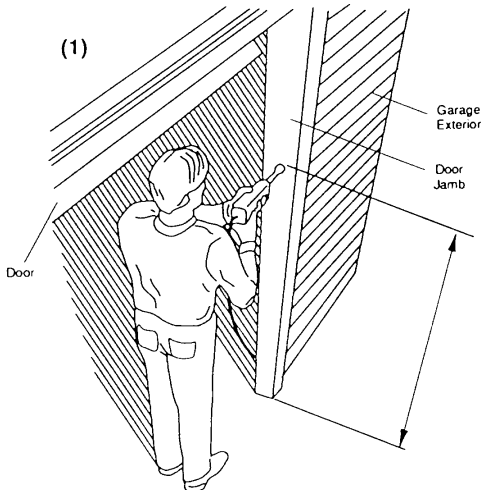


STEP 2: (Illustration 2). If your garage has a built-up jamb drill the hole to a depth of two inches. Then on the inside jamb, drill a second hole into the first hole to complete access.

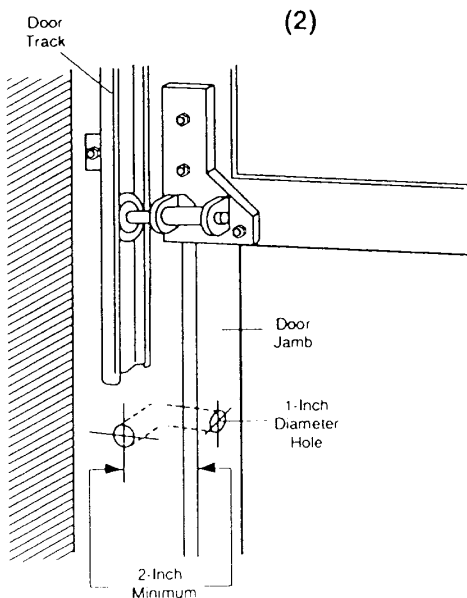

WARNING

Disconnect power to the garage door opener before proceeding.

STEP 3: (Illustration 3). Thread the bell wire through completed hole from inside the garage. Fasten wire to the Keylock terminal screws before attaching mounting place to jamb. In most cases, 4 screw nails will hold the wire around it before running wire to the opener terminals. **NOTE:** Instructions for attaching bell wire to opener terminals are on Page 2. **CAUTION:** Bell wire should be pulled taught to prevent access to wiring from outside the garage.

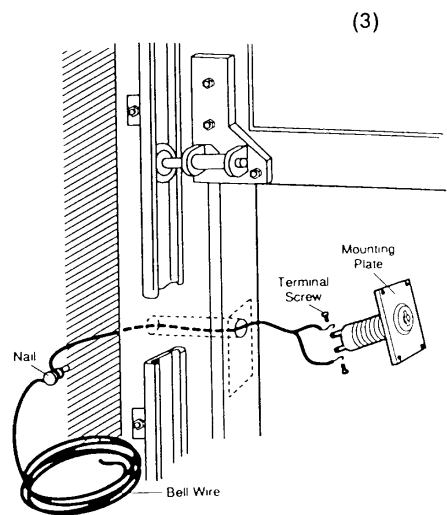

STEP 4: If screw nails won't hold the plate firmly in place, use anchor and nut supplied with hardware. (see illustration on Page 2). If anchor and nut are used, remove the Keylock terminal screws.

Insert switch in drilled hole. Install anchor and nut. Return screws to switch terminals. Fasten bell wire to terminals. Drive a nail into jamb and wind some wire around it before connecting to terminals on back of opener.